


PRELIMINARY AMENDMENT  
Attorney Docket Q62474

REMARKS

Entry and consideration of this Amendment are respectfully requested.


Respectfully submitted,

  
David J. Cushing  
Registration No. 28,703

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Date: April 5, 2001

FILED IN 2001 APR 10 10 40 AM

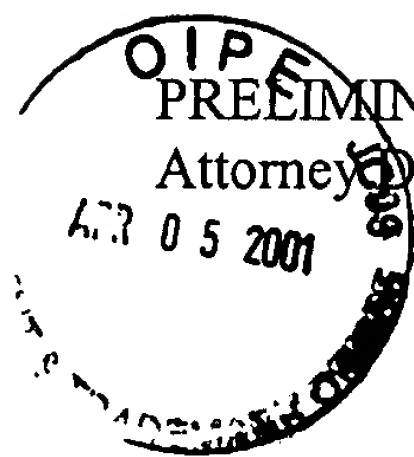

PRELIMINARY AMENDMENT  
Attorney Docket Q62474

## APPENDIX

### VERSION WITH MARKINGS TO SHOW CHANGES MADE

#### IN THE SPECIFICATION:

The specification is changed as follows:

Page 1, after the title, insert the heading

#### **BACKGROUND OF THE INVENTION**

Page 2, after line 1 (according to the line numbering), insert the heading

#### **SUMMARY OF THE INVENTION**

Page 3, after line 22, insert the heading

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Page 4, after line 1, insert the heading

#### **DETAILED DESCRIPTION OF THE INVENTION**

#### IN THE CLAIMS:

The claims are amended as follows:

4. (Amended) An inlet arrangement according to ~~any one of claims 1 to 3~~ claim 1, wherein the injector has inert gas injector vents (15) which point towards its airlock in addition to injector vents (14) which point towards the inside of the furnace.
5. (Amended) An inlet arrangement according to ~~any one of claims 1 to 4~~ claim 1, wherein at least one of the stages of seals is made up of stacked graphite seals (17A and/or 17B).
7. (Amended) A furnace for drawing fiber (2') including an enclosure (4') at the top of which is an opening to allow insertion of a preform, which moves vertically downwards in

PRELIMINARY AMENDMENT  
Attorney Docket Q62474

translation during fiber drawing, and a preform inlet arrangement (13') above the enclosure and including an injector (6') situated at the level of the preform inlet opening to inject inert gas onto the perimeter of the preform to fill the enclosure of the furnace, and at least one seal (17B) fixed by means of a seal support above the injector and through which the preform passes, whose cylindrical main body (9') it surrounds to prevent circulation of gas between the surrounding environment and the inside of the furnace at its level, characterized in that said furnace includes an inlet arrangement according to ~~any one of claims 1 to 6~~claim 1.

09/24/2014 04:05:01  
F05040 "4"454760